

Review on Bore Well Pipe Lifter and Transportation Machine

Mundhe Swapnil¹, Nikam Sandip², Kuhile Pravin³, Chavan Tanmay⁴, Choudhary V.V.⁵, Darade P. P.⁶
^{1,2,3,4}Student, ^{5,6}Asst. Prof. of Department of Mechanical Engineering, S.N.D. College of Engineering & R.C., Babulgaon, Maharashtra, India

Abstract— Now a day’s Bore well is very popular and major water source in India for domestic as well as agriculture field. The bore well drilling is carried out with the available highly cost machine. The average size of bore well drilling in India varies from 2 to 5 inches. Bore wells are deep and the submersible pump is at the bottom of the long bore well pipe. Conventionally the bore well pipe and pump are lifted out of the bore well using which and pulley block. This is a very time consuming and laborious work . The bore well pipe lifter and transportation machine gives more than 3m /min transfer rate which makes the mounting and dismounting of the submersible pump in bore wells very fast and very easy.

Keywords—Lifter, Chain pulley mechanism, Gear, Bore well, Motor.

I. INTRODUCTION


Now days bore well are the most important water source in india. It can be for domestic as well as agriculture purpose. The bore well drilling is carried with help of machine. The cost of process is high. The size of bore hole is varies 2 to 5 inches in india.

After the process is complete we required number of component to lift the water. There are no. of step to install the bore well pipe. For that we must required the mechanism and machine. Also there is need of number of labor to carry the whole process. Recent day labor are reduced due to the automation. In the ancient day process is carried out by chain pulley mechanism. The process required more time as well as no. of labor. After there is some innovation are done hydraulic and other type of machine which help in access lifting and installation process. The cost is more it is not affordable to everyone. Today’s requirement is to design small size machine or mechanism to lifting the installing the process with minimum cost.


II. INSTALLATION AND LIFTING PROCESS

After complete the bore well drilling process we have to install the submersible motor to lift the water for ground. Also to lower the water lifter pipe in the drilled hole. When we lower the pipe with considering human safety is must. The pipe installation is the important process in bore well water lifting mechanism. There are many types of machine are available in market. Ancient day the process is carried out with help of chain pulley mechanism. The process cost is less but more time required to carried the process. The lifting process is heavy it will create human health problem. The working person feeling the backbone problem after the long duration of services. The most important task of this process is to match the center of bore well.

All the problem can be solve by using latest mechanism the main problem is the cost is high so everyone afford this. The many step can be added due to the mechanism and machines. The all activity should be taken by considering human safety and effective installation. The some of the step are carried out during the process are mention in chart diagram in below.

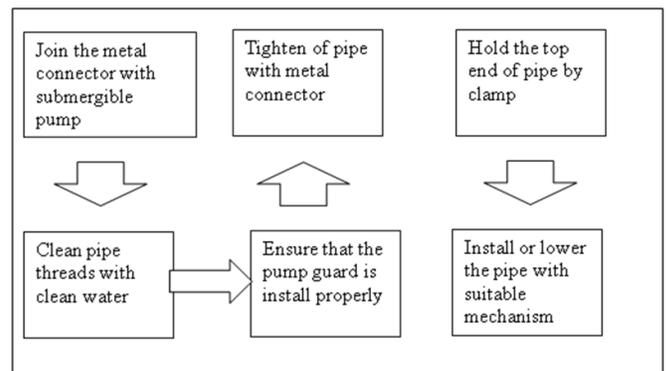

The lifting process is carried out by using above steps.

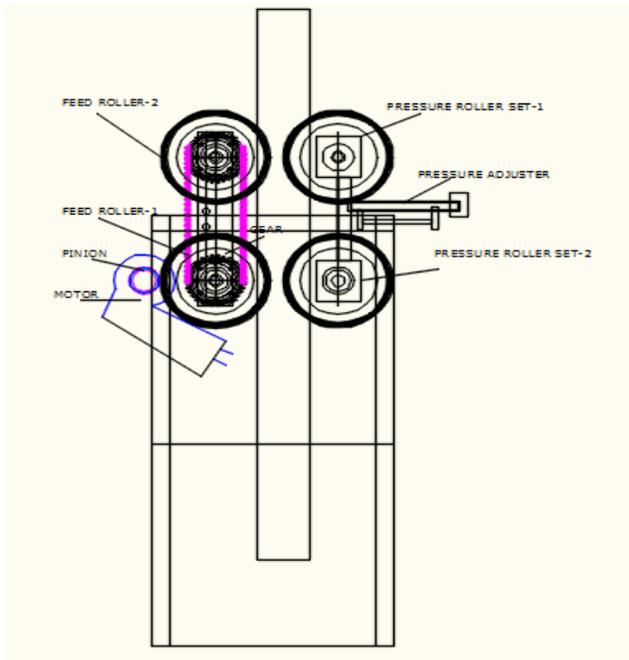

The Mechanism of this machine is same as that of the chain pulley mechanism. The difference between both are chain pulley mechanism work manually and developed mechanism work automatically. The bore well motor pump lifter has main three part. Bottom plate, top plate, Supported pipe etc. For lifting purpose we mounting some mechanical component on top plate. For power transmission purpose we mounted gear box, electrical motor and bearing on top plate. By using v-belt and pulley the electric motor transmit the power to gear box. Gear box used for increased the torque and reduced the rpm. The rpm reduction is from 1440 to 23 rpm for effective and safer operation the less rpm must required. The worm gear box are used in this machine for proper gripping and to hold the pipe while lowering pipe. In this machine we used circuit for upward and downward movement of pipe. We provide four pressure roller to support the pipe for lowering and lifting purpose. Also used pressure adjuster to adjust the pressure of pipe according to diameter of pipe. Chain are used between to two roller. Electrical supply provided to one roller it will rotated another roller with help of chain mechanism. It help to the lifting the bore well pipe. The benefit of this machine is it can work in restricted space available as dimension bottom plate or fixture is small. Two or three man required for operating the machine. Process is simple to operate. One is required to operate motor and other one is to carry and remove the pipes.

Skill person not required. The machine lifting capacity ranges from 100 to 1000kg as per design.

III. CONSTRUCTION OF MACHINE

Machine consists of the following system:

1. *Feed roller shaft-1:* This sub assembly comprises of ball bearing 6201 on both sides housed inside respective housing, wheel, shaft and locknut. The sprocket is mounted on the one end of the shaft.
2. *Feed roller shaft-2:* This sub assembly comprises of ball bearing 6201 on both sides housed inside respective housing, wheel, shaft and locknut. The sprocket is mounted on the one end of the shaft. This shaft also carries the gear which is driven by the motor.
3. *Motor and gear pair:* The motor is 12 volt DC motor which carries an integral pinion of 9 teeth that drives the gear with 58 teeth mounted on the feed roller shaft.
4. *The pressure roller sub assembly:* This sub assembly comprises of roller shaft held in ball bearings 6201 and the rollers (two on each shaft are freely rotating about it). The Pressure roller pressure is adjusted using the pressure adjuster mechanism.
5. The pressure adjuster mechanism comprises of the screw and nut that are driven by the handle. When screw is rotated the nut will slide on the slide to push the pressure roller forward to increase the pressure and vice versa.
6. *Frame:* The frame is the support structure that holds the entire sub assembly of the system in place

IV. WORKING OF MACHINE

Load pipe between the pressure roller and feed rollers. Adjust the contact pressure using pressure adjuster screw. Select the direction of rotation of motor depending upon the raising or lowering operation using 2-pole 2-way switch. Start motor. Motor rotates the pinion which drives the gear which then drives the roller shaft-1. Rotation is transferred to roller shaft-2 via chain drive. Motion of the feed rollers will cause the pipe to move up or down simultaneously the pressure rollers will also rotate. Stop motion of the motor when desired height of the pipe is reached.

V. ADVANTAGES

1. Machine is simple to operate.
2. Does not require skilled labor to operate.
3. Low manufacturing cost.

4. Compact inspace.
5. Low maintenance cost.
6. Sizes of pip can be adjusted from 32 mm diameter to 56 mm diamete in the same set of rollers.
7. Fast in operation.
8. Low noise.
9. Easy to install.
10. Low weight makes it portable.

VI. CONCLUSION

We conclude that our project bore well pipe lifter and transportation machine will to reduce human effort, manual operated errors, it help to Improvement in time economics, i.e. Reduction in the time required for installation and lifting procedure also improve the performance of worker. We tried our best level to create a successful bore-well pipe lifter and transportation machine. Since the actual machine cost is high, we designed in computer and we made it as model with few features excluded from the original proposed machine.

Acknowledgment

We are thankful to Prof. Chaudhary V.V. for their valuable support.

We are thankful to our parents, friends and teachers who have provided their wishful support for completion of our project work successfully.

REFERENCES

- [1] "Modeling, Analyzing and fabrication of lifting SPR book for bore well pipe 2014" IJDER | volume 2, issue 1| ISSN: 2321 -9939.
- [2] Guidelines of construction and construction of bore well pipe and tube wells, 2014 Research Design and Standard Organization Lucknow-226011.
- [3] Dr. C.N.Sakhale , D.N.Mate , Subhasis Saha, Sahil Kumar, " Approach to Design of Child saver machine for child trapped in borehole." Volume 1, Oct-Dec, 2013,pp-26-38, IASTER2013.
- [4] Big Bore Well Drilling in New Zealand – A Case study, John Bush and Christine siege, proceeding world geothermal congress 2010 bali, Indonesia, 25-29 April 2010.
- [5] [http:// en.wikipedia.org/wiki/bore well motor lifting machine in India.](http://en.wikipedia.org/wiki/bore_well_motor_lifting_machine_in_India)
- [6] IJISM ISSN-2319-6386, Volume-1 Issue-10,September 2013 Structural analysis of crane hook using finite element method-Ajeet Bergaley ,Anshuman purohit
- [7] Camp, James McIntyre; Francis, Charles Blaine, The making, shaping and Treating of Steel, Pittsburgh Carnegie steel company, pp. 173-174, ISBN 1-147-64423-3
- [8] Oberg, Erik; ET. El. (2000), machinery's Handbook, New york: INDUSTRIAL PRESS, Inc.,p. 476, ISBN 0-8311-2666-3